

0,13
+
0,06


Самозакрывающаяся разрывная муфта, соотв. EN 13617-2 как защита от несчастного случая при отъезде с места заправки. Для монтажа между раздаточным краном и шланговой системой COAX. Отрывается при осевом и угловом рывке менее 150 кг. Дополнительные тех. данные см. "Руководство по монтажу и ремонту **CSB 21**". Материалы: алюминий. Внутр. детали из пластика, устойчивого к топливу, уплотнительные кольца из витона. Штучно проверено, контрольное клеймо. **BT 21** из мягкого PVC для безопасности человека и материала и входит в поставку.

*Self-sealing break-away coupling acc. EN 13617-2 as safety against drive-off incidents. For assembly between vapour recovery nozzle and COAX hose assembly. Separates at axial or angular pull-of forces less than 150 kg. Further technical data see "Installation and Reassembly Guide **CSB 21**". Material : aluminium. Inner parts of fuel resistant plastics. O-rings of FKM. Parts are subjected to detailed inspection. - The break cover **BT 21** of soft PVC is an integral part of the CSB 21 and serves as safety for men and material.*


CSB 21
(+ BT 21)

| черн. |
| син. |
| желт. |
| зел. |
| красн. |
| — |
| black |
| blue |
| yellow |
| green |
| red |

COAX SAFETY BREAK CSB 21

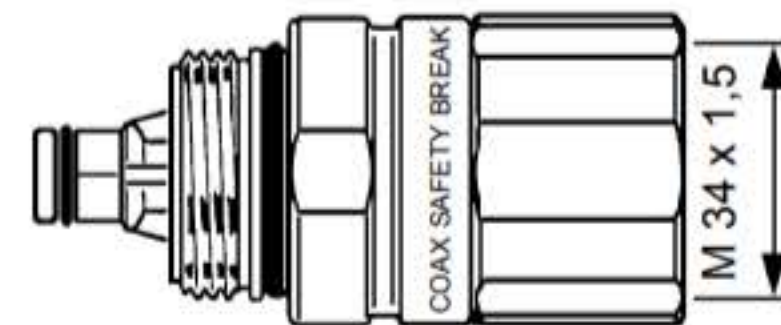


BT 21 —


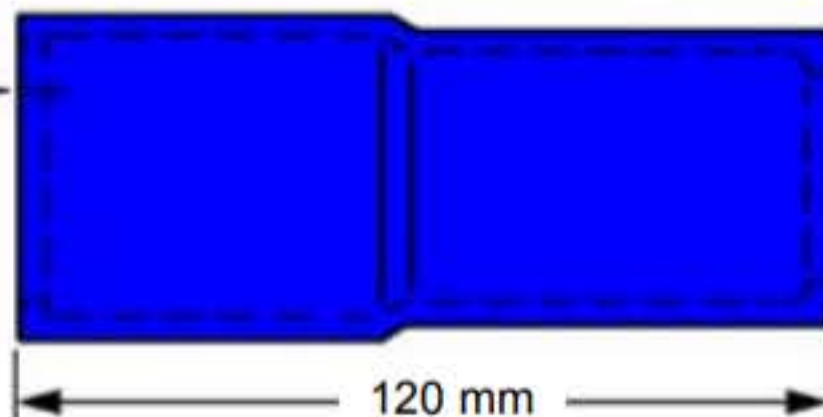


ZVA 200 GR

BT 21


KS 21

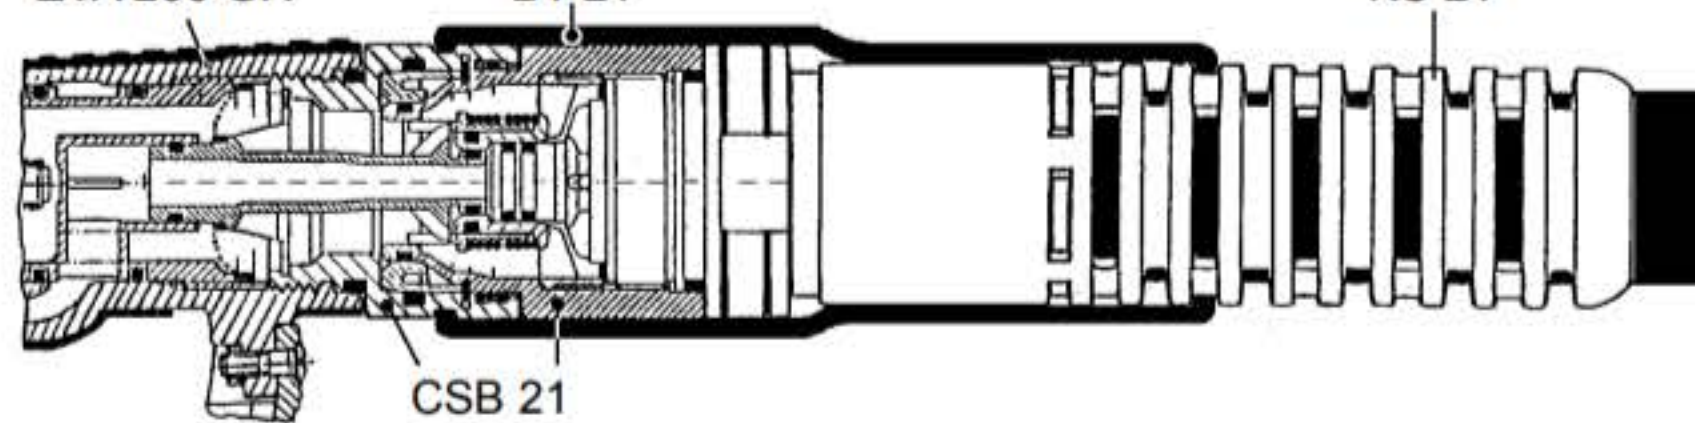

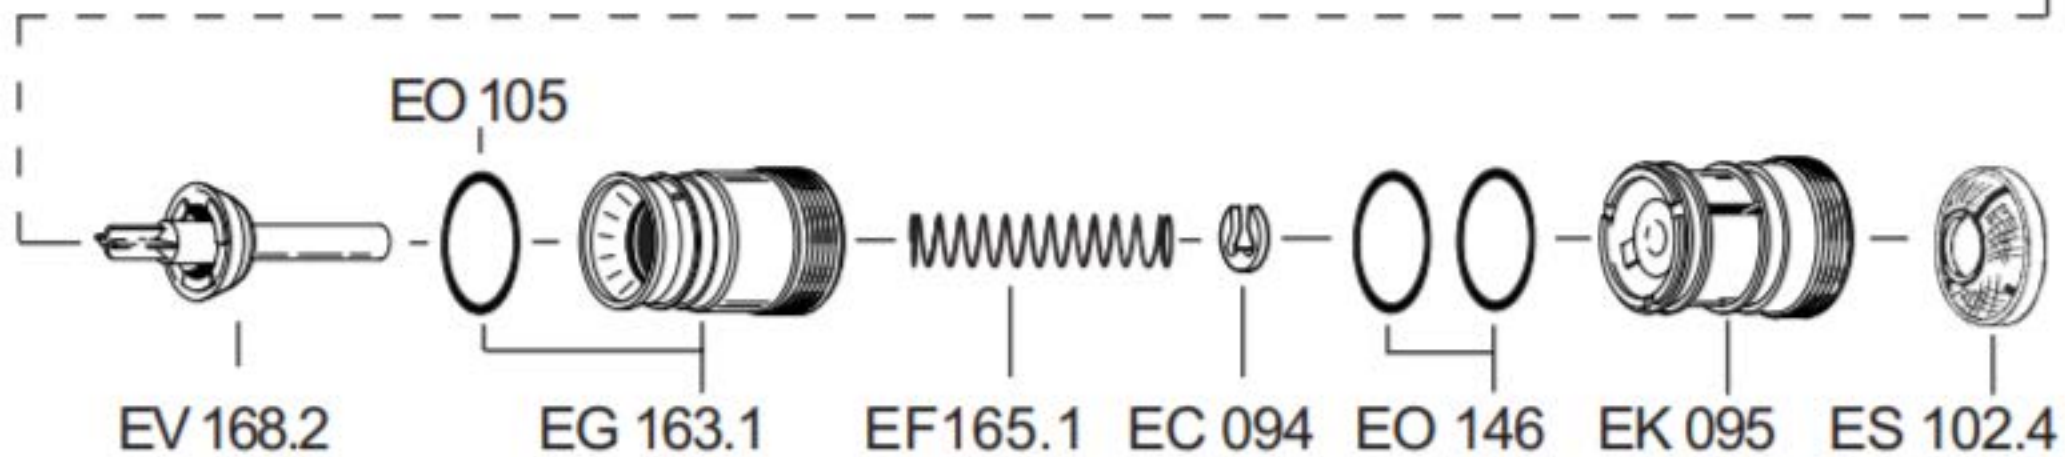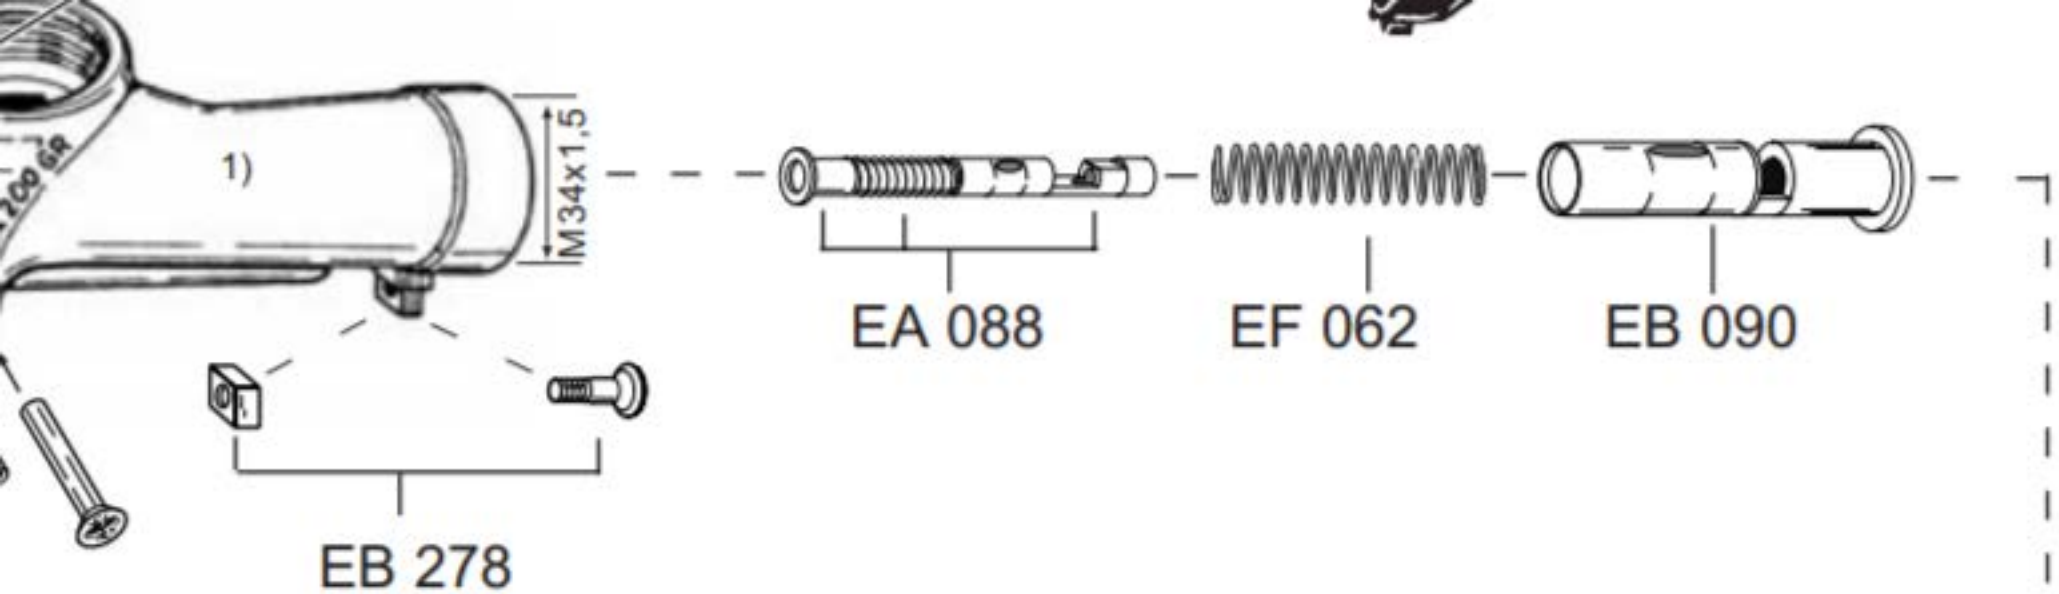

CSB 21

(EA 740)

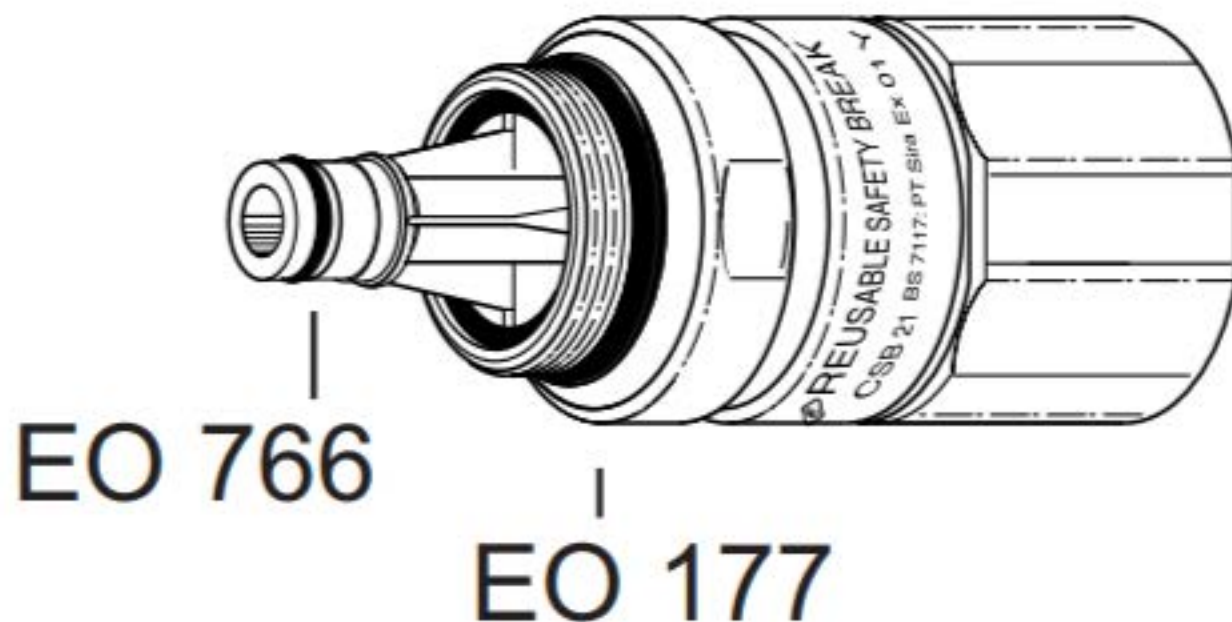

BT 21

f. CSB 21

Schwarz (Standard)

Blau, Grün,

Gelb, Rot

Black (Standard)

Blue, Green,

Yellow, Red

